

FEATURES

Recessed LED single spot, OM2 series.

Housing

The integrated body structure provides strong heat dissipation.

Reflector

NGR(Non Glare Reflector) Technology providing comfort and quality light to reduce stress.

Dust & Scratch proof reflector.

Optic

20° beam angle available.




Product ordering number **11220W-827H-003-020**
11220W-830H-003-020
11220W-840H-003-020

SPECIFICATIONS

INDEX		DATA
DIMENSION	mm	W90 X L90 X H57
WEIGHT	Kg	0.25
OPERATING VOLTAGE	V	AC 100~240V
POWER CONSUMPTION	W	3.5 (with power supply unit)
OUTPUT POWER	W	2
COLOR TEMPERATURE	K	2700 / 3000 / 4000
LUMINOUS FLUX	lm	220
LOR	-	0.71
COLOR RENDERING INDEX	Ra	Over 80
BEAM ANGLE	°	20
IP RATING	-	20
STORAGE HUMIDITY	%	20% ~ 70%
STORAGE TEMPERATURE	°C	-40°C ~ +50°C
OPERATING TEMPERATURE	°C	-20°C ~ +50°C



SMPS

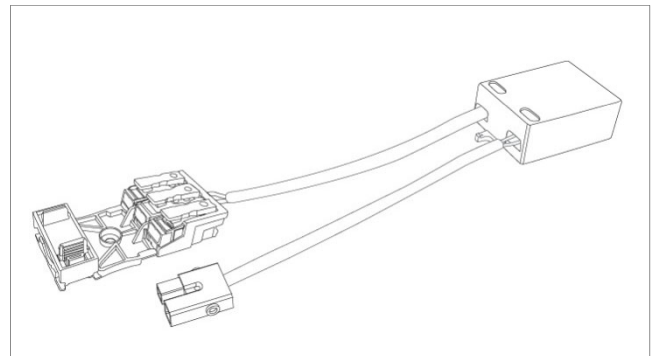


INDEX	ORDER NUMBER	NOTE
ON/OFF	80000	
ON/OFF	80032	JAPAN

PHOTOMETRIC DATA


m	20° Ø(m)	lux(center/side)
1	0.35	1108/608
2	0.71	277/152
3	1.06	123/68

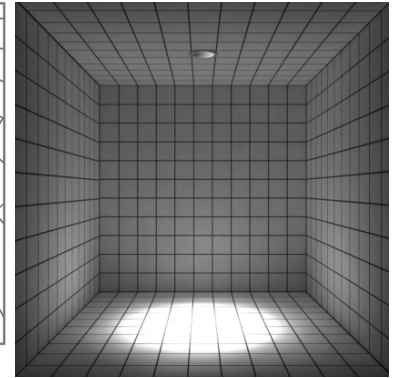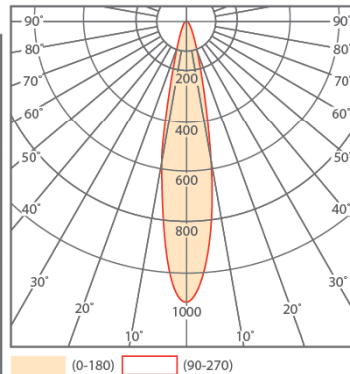

DRAWING DATA

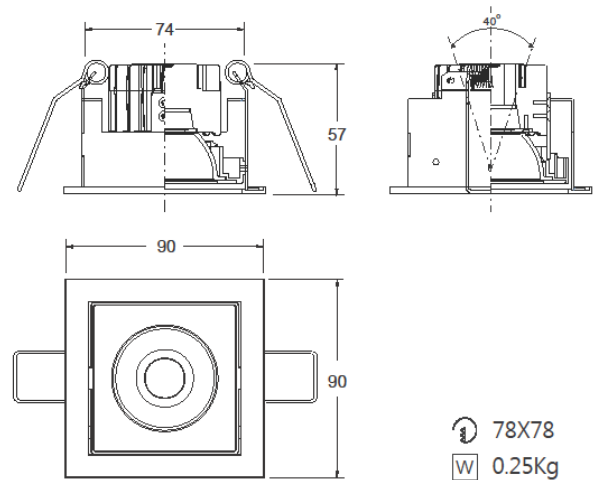

INSTALLATION INSTRUCTIONS

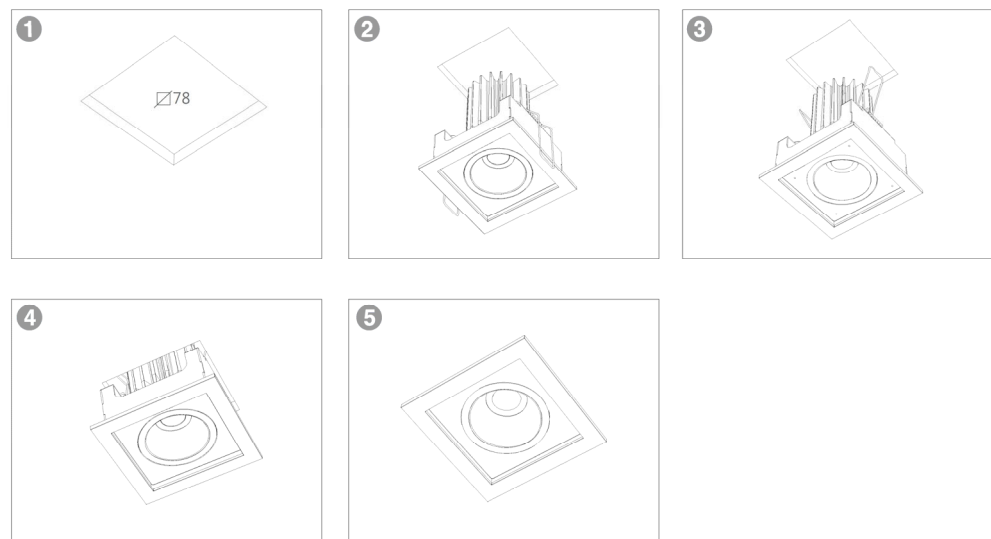

NOTES

Attention Read carefully before installing.

The safety of this fixture is guaranteed only if you comply with these instructions. Save these instructions for future use.
The operating temperature is between -20°C and +50°C.

ALTO

ALTO LIGHTING CO., LTD www.alto.co.kr

H-Tower, 15, Beodeunaru-ro, Yeongdeungpo-gu, Seoul, Republic of Korea

Tel. 82.2.2176.1746 Fax. 82.2.2176.1781 altoled@alto.co.kr